

# DRY

## BATTERY

DRY | CONVENTIONAL

REF **12N24-3A**



**12v** VOLTAGE - V

**220A** CCA - A

**25.2Ah** CAPACITY - Ah (20Hr)

**24Ah** CAPACITY - Ah (10Hr)

### TECHNOLOGY

- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

### FEATURES


- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

### UPGRADE FOR

### WEIGHT


Battery (with acid): Approx 7.66kg

### MOUNTING ANGLE

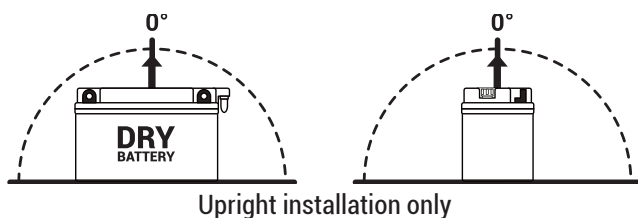

### DIMENSIONS

Length (A): 184mm ±2mm  
 Width (B): 124mm ±2mm  
 Container height: 175mm ±2mm  
 Total height (C): 175mm ±2mm

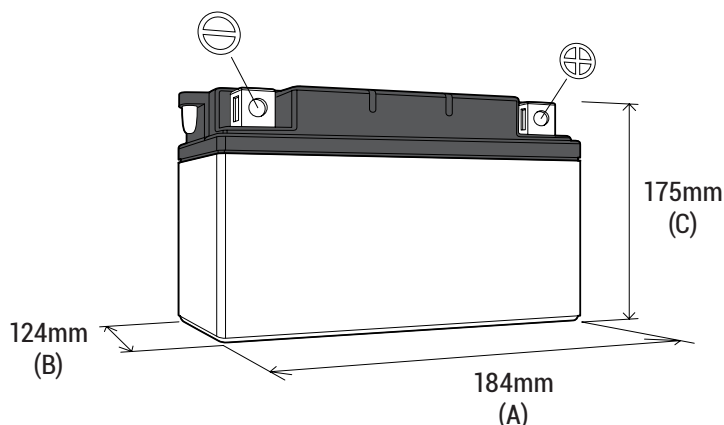

### TERMINALS (mm)

