

**DRY**  
BATTERY

**DRY | CONVENTIONAL**

REF **BB5L-B**

**12v** VOLTAGE - V

**65A** CCA - A

**5.3Ah** CAPACITY - Ah (20Hr)

**5Ah** CAPACITY - Ah (10Hr)

**TECHNOLOGY**

- Lead acid dry charged construction (absorbed acid)
- No acid in cells, must be filled with acid before use
- 6 & 12V batteries

**FEATURES**

- Upright installation only
- Has to be checked periodically and refilled with water if necessary
- Internal gas emission through venting hole
- Handle with care to prevent acid spillage
- Regular life duration
- Does not need to be recharged while stocked

**UPGRADE FOR**

12N5-3B

**WEIGHT**



Battery (with acid): Approx 2.00kg

**MOUNTING ANGLE**



Upright installation only

**DIMENSIONS**


Length (A): 120mm  $\pm$ 2mm  
 Width (B): 60mm  $\pm$ 2mm  
 Container height: 130mm  $\pm$ 2mm  
 Total height (C): 130mm  $\pm$ 2mm

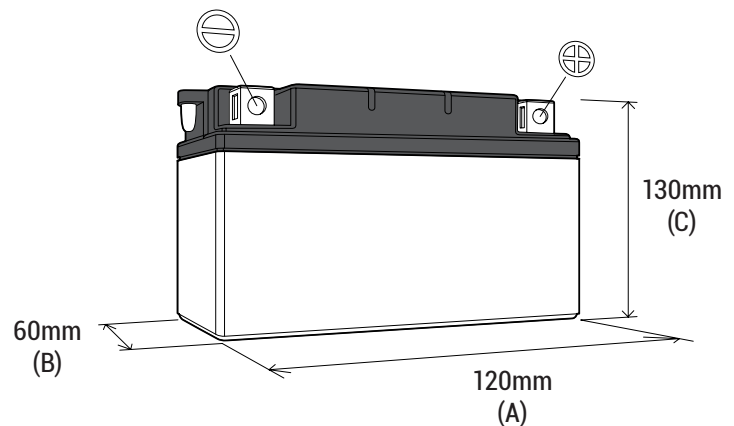
**TERMINALS (mm)**


FRONT



SIDE



TOP